









Door Type
System Name
Frame Depth
Material
Rating
Colour Options
Glass Options
Panel
Hardware

Entrance Door
Series 065
65mm / 2 1/2"
Insulated Aluminum (AlMgSi 0,5) with 1" thermal break
EN (European Norm) EN ISO 10077-2: Uf=1,9-2,7W/(m²K)
Anodized: Clear (C-0), Dark Bronze (C-34), Black (C-35)
Powder-Coat: Classic RAL colours (255 Colours), 2-tone colours available
Standard 24mm (15/16" OA) Insulated Glass Units, tempered.
Available up to 42mm (1 5/8")
Insulating Panel as sash panel or sash covering panel
Fuhr Multi-Point Lock (standard type "8")
Lever Handle (Interior / Exterior).




Weight of casement in kgs max.	130
 Wind-resistance EN 12210 / EN 13116	C5/B5
 Driving-rain resistance EN 12208 / EN 12 154	9A
 Permeability of air-resistance EN 12207 / EN 12 152	4
 Operating force EN 13115	1
 Mechanical stress EN 13115	4
 Locking function EN 12400	2
 Break-in resistance DIN N EN 1627:1999	WK 1-3
 Noise-insulation class EN 20 140-3	1-5
Heat transition coefficient EN ISO 10077-2	Uf=1,9-2,7W/(m²K)

System Minimum & Maximum Sizes:

		Maximum	
		Width	Height
- Custom Sizes			
* Maximum Sash Weight (including glass):	Single Door	1.5m*	2.74m*
not to exceed 130KG or 286Lbs	(up to)	5'0"	9'0"



Hardware Options


Lock Options:
 - Lock Type 3
 - Lock Type 9
 - Electric Strike
 - Fuhr Multi-Tronic 885
 - Finger Scan
 (only with Multi-tronic 885)

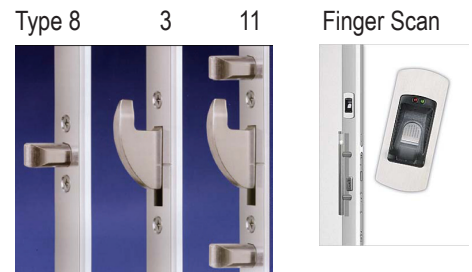


Handle Options

STANDARD INTERIOR HANDLE

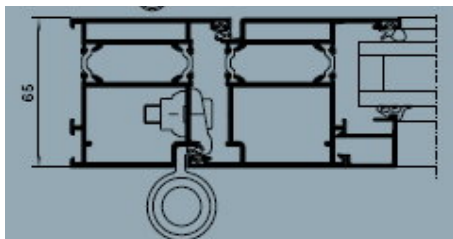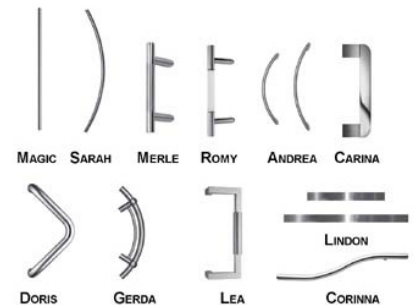


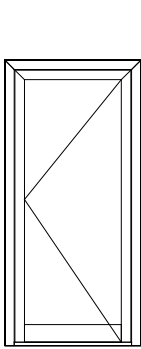


101

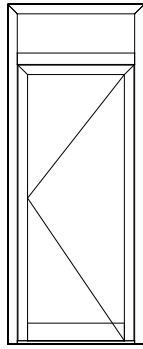


102

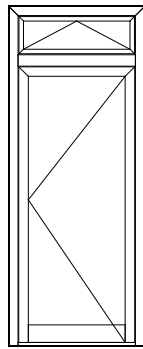


103

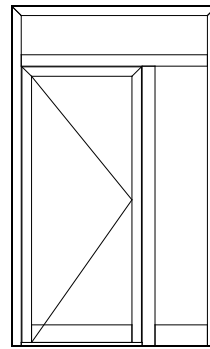


104

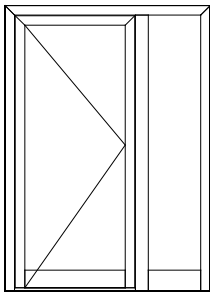


105

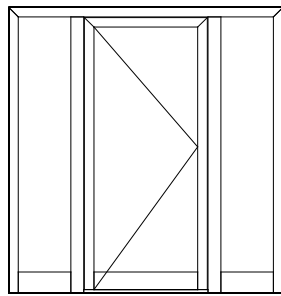


106

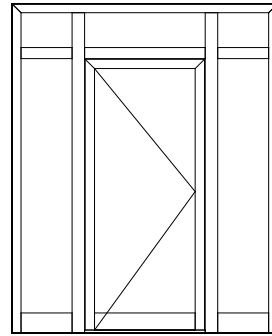


107

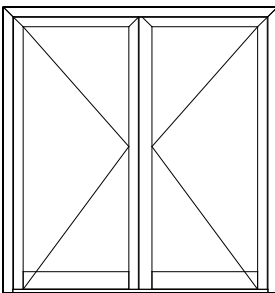


201

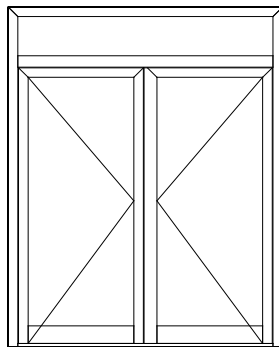

202

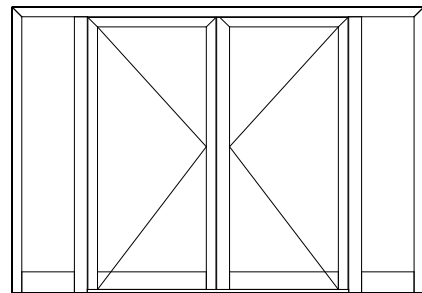

203

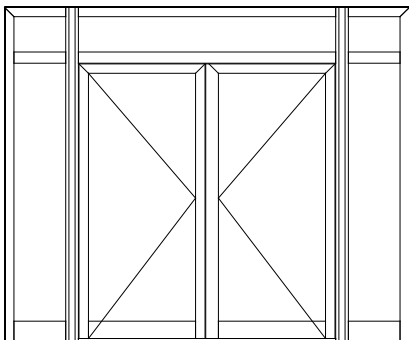

204